

Modular design, Dispenser Solenoid Manifold including coalescing filters can be easily integrated with any brand of dispenser. Modular design allows for ease of servicing and reduced replacement costs. Utilizing our well-proven solenoid manifold design to further enhance long service life, combined with easy access to coalescing filters ensures continual and accurate operation.

Performance:

Operating temp:	-20 °C – 80 °C
MAWP	5000 psi
Flow Rate:	50 Kg/Min
Coil Power consumption	240/250 V AC 10 W
Coil test voltage	1500 V

Standard Specifications:

- Nominal Bore: 15 mm
- Weight approx: 15 kg
- Inlet Ports: 3/4"
- Outlet Ports: 1/2"
- 6 Solenoid Valves
- 3 Coalescing Filters




Standard Materials:

Manifold	Aluminium Alloy
Valve components	Stainless Steel
Seat	PEEK
Seal	Nitrile

Options:

- Mounting Bracket
- Drain Valve
- Isolating Valve

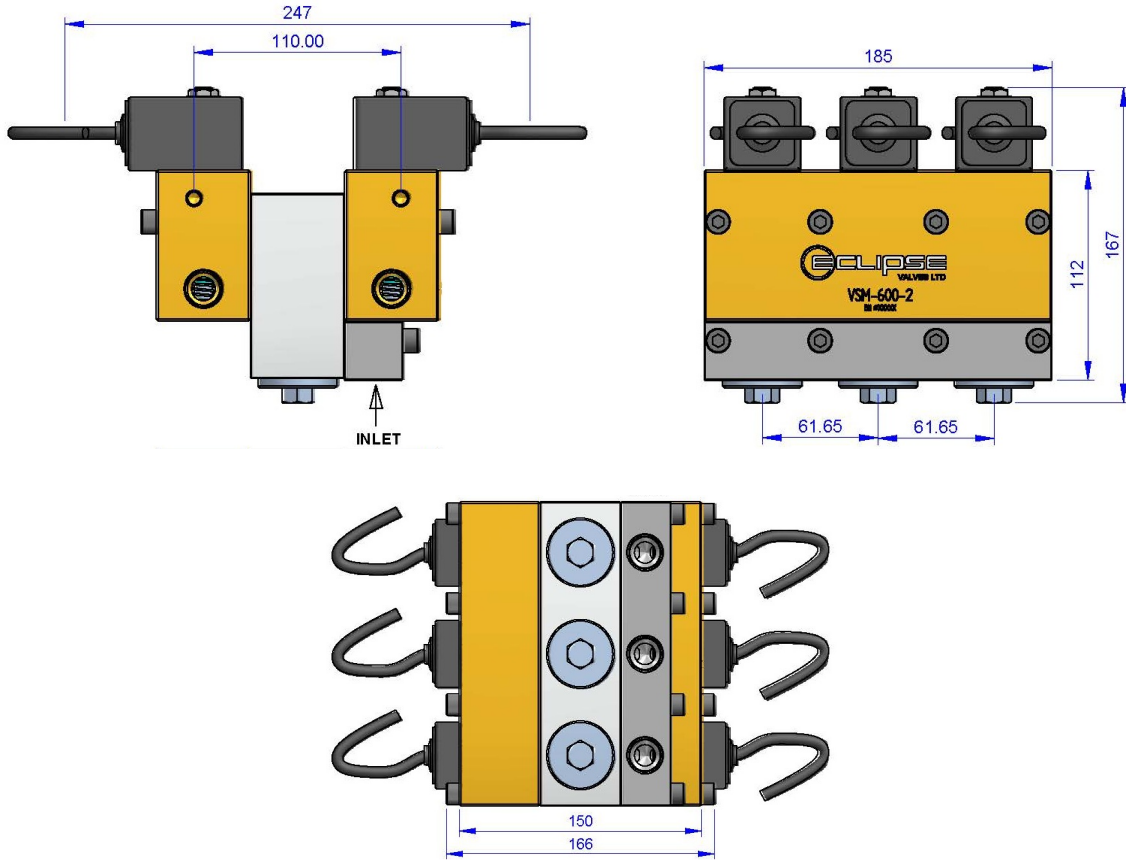

Ordering Information:

Please supply the following information when ordering

- Flow Medium
- Port configuration
- Operating temperature range
- Inlet Pressure
- Coil Voltage
- Flow rate

If an option is required that is not listed here, please contact our sales team

*Sizes and specifications are subject to change without notice

www.eclipsevalves.com
 Email: sales@eclipsevalves.com Phone: +64 9 292 9115
 113 North Rd, Clevedon, Auckland 2582, New Zealand

